



For low drain/long term operating applications requesting.  
Good voltage response in  $-55^{\circ}\text{C} \sim 125^{\circ}\text{C}$  environments, such as: TPMS(Tire Pressure Monitor System).

## ELECTRICAL CHARACTERISTICS

(typical values for cells stored for one year or less, at  $25^{\circ}\text{C}$ )

### Nominal capacity

0.40Ah

(At 1.0 mA,  $+25^{\circ}\text{C}$ , 2.0V cut off. The capacity restored by the cell varies according to current drain, temperature and cut off voltage.)

### Nominal voltage

3.6V

### Maximum recommended continuous current

5mA

(To get 50% of the nominal capacity at  $+25^{\circ}\text{C}$  with 2.0V cut off. Higher currents possible, consult EVE.)

### Maximum pulse current capability

15mA

**Pulse capability** varies according to pulse characteristics (frequency and duration), temperature, cell history (storage conditions prior to usage) and the application's acceptable minimum voltage.

### Storage

(recommended)

$30^{\circ}\text{C}$  max

(for more severe condition consult EVE)

### Operating temperature range

$-55^{\circ}\text{C} / +125^{\circ}\text{C}$

(Operation at temperature different from ambient may lead to reduced capacity and lower voltage plateau readings.)

### Typical weight

9g

## ER2450T

Lithium-thionyl Chloride  
(Li-SOCl<sub>2</sub>) Battery

### KEY FEATURES

- ✓ High and stable operating voltage
- ✓ High minimum voltage during pulsing
- ✓ Low self discharge rate (less than 1% after 1 year of storage at  $+25^{\circ}\text{C}$ )
- ✓ Stainless steel container
- ✓ Hermetic glass-to-metal sealing
- ✓ Non-flammable electrolyte
- ✓ Non-restricted for transport
- ✓ Compliant with IEC 86-4 safety standard and EN 50020 intrinsic safety
- UL Underwriters Laboratories (UL) Component Recognition (File Number MH28717)

### MAIN APPLICATIONS

- ✓ Utility metering
- ✓ Alarms and security devices
- ✓ Memory back-up
- ✓ Tracking systems
- ✓ Automotive electronics
- ✓ Professional electronics ... etc.



### WARNING:

Fire, explosion and severe burn hazard. Do not recharge, crush, disassemble, heat above  $100^{\circ}\text{C}$ , incinerate, or expose contents to water.


Note: Any representations in this data sheet concerning performance are for informational purpose only and are not construed as warranties, either expressed or implied, of future performance.

# ER2450T

## 1. DISCHARGE CHARACTERISTICS@+25°C

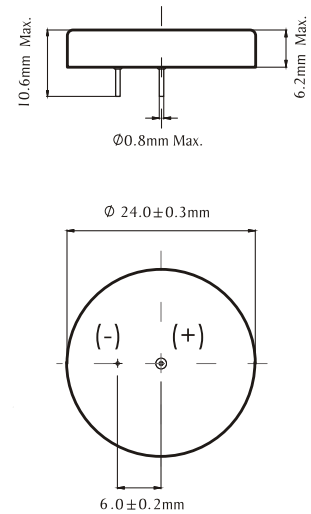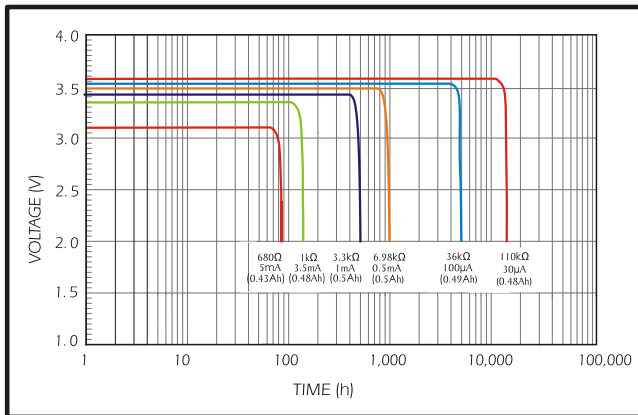

## 2. VOLTAGE VS. TEMPERATURE

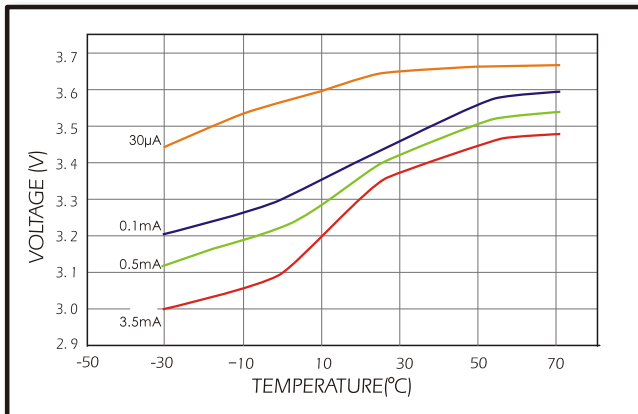


## AVAILABLE TERMINATIONS


Suffix -/P

Tinned Nickel Pins

## 3. CAPACITY VS. CURRENT

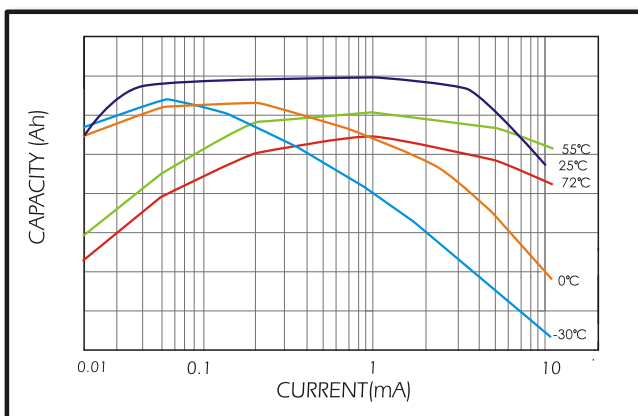

## 4. STORAGE CHARACTERISTICS

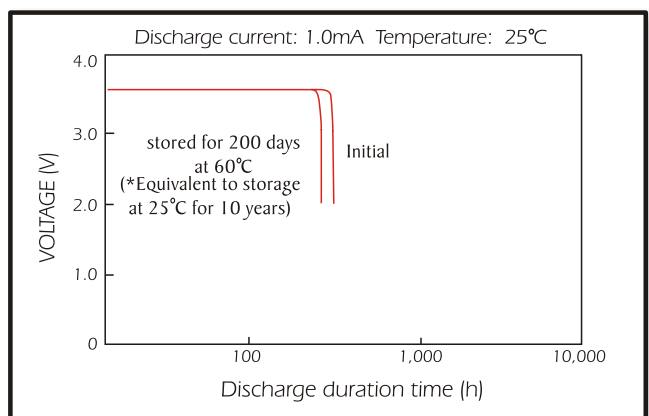

## EVE ENERGY CO., LTD.

Address.: EVE Industrial Park, XiKeng Industrial zone, Huihuan Town, Huizhou, Guangdong, China  
Operator: (86-752)260 6966 Fax: (86-752)260 6033

<http://www.evebattery.com> Email: [sales@evebattery.com](mailto:sales@evebattery.com)

Latest version can be downloaded from the EVE website

May 2010